


TONABLE FLAT DROP

9/125
SINGLEMODE OS2

002FD-SMBP 2 Fiber Toneable Flat Drop - Black Singlemode OS2

FIBERTRONICS 

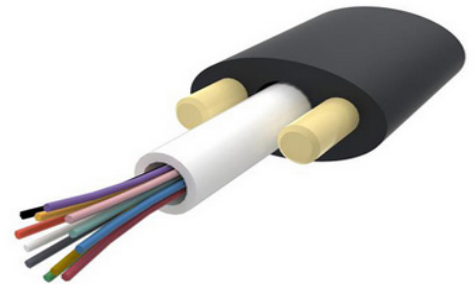

This Toneable Flat Drop OSP cable is designed with strength and flexibility in mind.

Toneable Flat Drop FTTx offers the most amiable solution for fiber to the home or to the premises applications. The toneable wire allows for spotting and tracing after installation. Our small profile reduces cost and can be used in small conduits.

Features & Specifications

- Toneable element installed
- Dry standard core
- Crush Resistance
- Ease of location
- Sold by the foot
- Eliminates the need for converting length

Outer Diameter (mm)	0.35in (9mm)
Bend Radius	3.15in (76mm)
Material	OSP Rated/UV Rated
Color	Black
Toneable Element	24 AWG
Operating Temperature	-40°C ~ +70°C
Storage Temperature	-30°C ~ +70°C