


4-Fiber Optic Termination Box

1 Input Port at 8mm – 4 Output Ports at 3mm

Overview

Fibertronics Inc. offers a variety of fiber optic termination boxes engineered to securely house and organize fiber splices, connectors, and pigtails. Suitable for a wide range of applications—including telecommunications, data centers, and network equipment rooms—these enclosures provide a protected environment that ensures stable performance and simplifies cable management. With durable construction and user-friendly features, our termination boxes support efficient fiber distribution, minimize signal loss, and promote long-term system reliability.

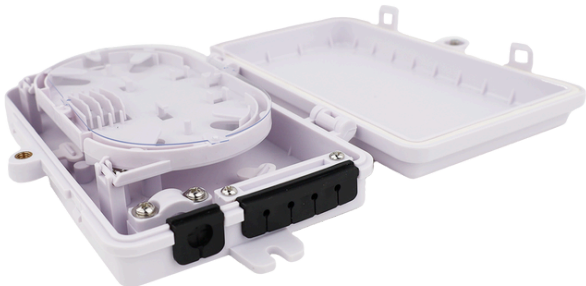

Features

- Wall-mountable or pole-mountable
- Easy installation and maintenance
- Bend radius protection for fiber cables
- Integrated splice trays for fiber management
- Durable, weather-resistant construction

Applications

- FTTH and FTTB installations
- Data centers and server rooms
- Telecommunications and broadband networks
- Enterprise LAN/WAN infrastructures
- Outdoor/indoor building entry points

Technical Specifications

Ports	1 Input Port and 4 Output Ports
Splice Capacity	4 Fibers
Splitter Compatibility	1x4 PLC Splitter
Cable Diameter	1x Φ 8mm max. / 4x Φ 3mm max.
Dimensions	210mm x140mm x 40mm
Adapter Slots*	Up to 4x SC Simplex -OR- LC Duplex
IP Rating	IP54
Housing Material	PC + ABS
Accessories	Wall Mount Kit

*Accepts both flanged and non-flanged adapters (sold separately)