



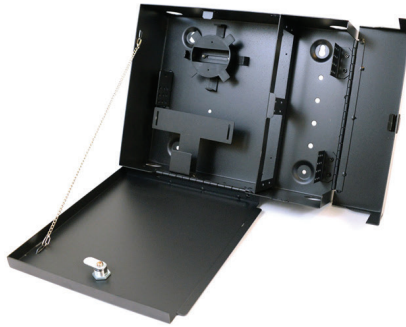

WTB-FWM-6004 4 LGX, Wall Mount Patch Panel with 2 Doors

FIBERTRONICS 

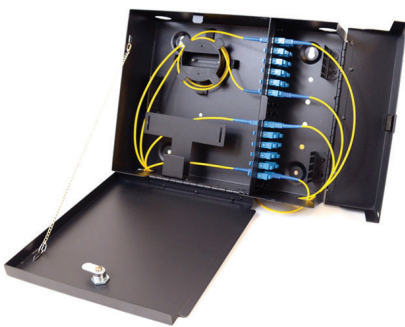

The WTB-FWM-6004 is a high density wall-mount fiber optic enclosure designed to support patching and splicing in one unit.

The unit has 4 adapter panel positions allowing for a wide range of fiber termination connector types. It is equipped with a set of keys that allow access to the network side of the panel. If required a padlock can be added to the distribution side, maintaining separation and security between the network and distribution sides of the termination panel.

Product Features

- 4 LGX Adapter Panels
- 2 Slack Spools
- High Density
- Powder Coated
- 2 Outer Doors
- Network Side Door is Key Locked
- Distribution Side Door with Padlock Option (Padlock not included)
- Screw Holes on the Rear Panel

Technical Specifications

Below are the specifications of this wall-mountable, fiber optic patch panel. These include patch panel positions, ports, dimensions and materials.

Adapter Capacity	04 LGX Adapter Panels
Ports	4 Port - Ø25mm (0.98")
Splice Trays	Supports 1
Supported Splice Trays	TRAY-X1, TRAY-X2, TRAY-X3, TRAY-X4, FT-TRAY12, FT-TRAY12AL, FT-TRAY24, FT-SET12
Lockable	Yes
Type	Double Doors
Material	16 Gauge Powder Coated Steel
Height	289mm
Width	362mm
Depth	106mm
Weight	4.94kg (10.89lbs)
Color	Black

Accessories

Below is a list of the accessories that are included with this product.

Keys:	2
Cable Ties:	5
Grommets:	4
Cable Management Rings:	1
Laser Warning Labels:	1
Location Label:	1
Grounding Screw:	1

Please Note: Mounting hardware is not included.