




WTB-FWM-6012 12 LGX, Wall Mount Patch Panel with 2 Doors

FIBERTRONICS 

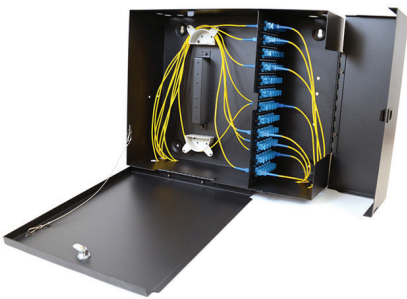

The WTB-FWM-6012 is a high density wall-mount fiber optic enclosure.

The unit has 12 adapter panel positions allowing for a wide range of fiber termination connector types. It is equipped with a set of keys that allow access to the network side of the panel. If required a padlock can be added to the outer door which allows access to the distribution side, maintaining separation & security between the network & distribution sides.

Product Features

- 12 LGX Adapter Panels
- 1 Slack Spool
- Cable Management Bracket
- High Density
- Powder Coated
- 1 Outer Door with padlock option (Padlock not included)
- 1 Inner Door with keyed lock
- Screw Holes on the rear panel

Technical Specifications

Below are the specifications of this wall-mountable, fiber optic patch panel. These include patch panel positions, ports, dimensions and materials.

Capacity	12 LGX Adapter Panels
Port	12 Port
Lockable	Yes
Type	Double Doors
Material	16 Gauge Powder Coated Steel
Height	415mm (16.5")
Width	517mm (20.0")
Depth	163mm (6.5")
Weight	9.43kg (20.78lbs)
Color	Black
Weight	8.12kg (17.90lbs)
Color	Black

Accessories

Below is a list of the accessories that are included with this product.

Keys:	2
Cable Ties:	5
Grommets:	12
Cable Management Rings:	10
Laser Warning Labels:	1
Location Label:	1
Grounding Screw:	1

Please Note: Mounting hardware is not included.