
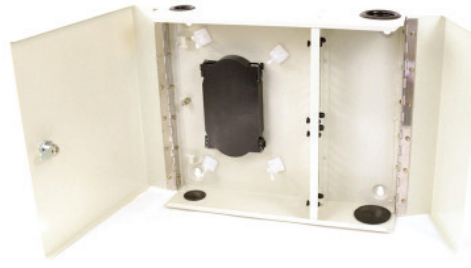


FT-WTB-5BD-24 24 Adapter Slot, Indoor Wall Mount Box, 2 Doors

FIBERTRONICS 

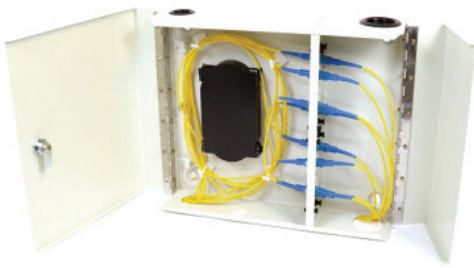

The FT-WTB-5BD-24 is a wall mount box designed for use in small capacity communication systems.

The cabinet is composed of two parts, one links with optical cables for fusion connections between optical cable and fiber pigtails and another connects with patch cords. It is wall mountable with lockable doors for added security. Various accessories help avoid avoid any unexpected damage to the fiber.

Product Features

- 4 Adapter Holders with 24 Adapter Slots
- High Density
- Electrostatic Spraying
- Indoor Box
- Patching and Splicing in one unit
- 2 Outer Doors with keyed lock

Technical Specifications

Below are the specifications of this wall-mountable, fiber optic patch panel. These include patch panel positions, ports, dimensions and materials.

Adapter Capacity	24 Adapters
Splice Trays	02 Splice Trays
Splice Capacity	24 Splices
Ports	4 In Ports - Ø30mm (1.18"), 2 Out Ports - Ø50mm (1.96")
Lockable	Yes
Type	Double Doors
Material	Cold Roll Steel, Electrostatic Spraying
Height	305mm (12")
Width	355mm (14.0")
Depth	90mm (3.54")
Weight	3.45kg (7.60lbs)
Color	White

Accessories

Below is a list of the accessories that are included with this product.

Keys:	2
ST/FC Adapter Plates:	1 Pack
Adapter Plate Rivets:	1 Pack
Adapter Screws:	2 x Packets
Wall Anchors:	4
Steel Duct Clamps:	2
Additional Accessories:	2 x Packets of Splice Sleeves, Cable Ties and Location Labels

Please Note: Mounting hardware is not included.